


10 HDB/PT Easy Loader Series 10 Ton Tag - Electric Brake

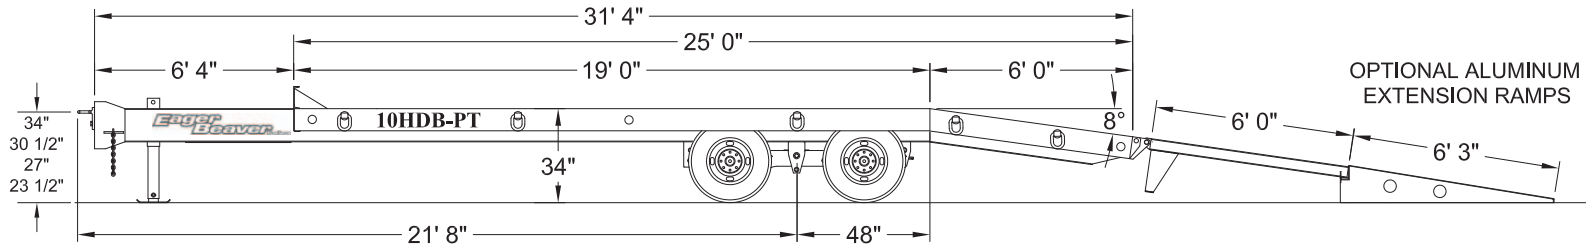

SPECIFICATIONS

Capacity: 20,000 lbs. **Trailer Weight:** 5,940 lbs.

Deck Width	8 ft. 6 in. Length: 19 ft. Height: 34 in.
Frame	Mainrails: W12" x 16 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer 8° Beaver Tail (Safe Low Loading Angle)
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 1 3/4" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	12 volt L.E.D., DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 3/8" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	12,000 lbs. static / 10,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Black, Yellow, Blue (standard) Imron Paint

RUNNING GEAR

Tires	Eight 235/80R16 (E) Steel Belted Radial
Hubs/Wheels	Four 8 Stud on 6 1/2" BC (2 pc hub & drum), Eight 6.00 x 16 Disc Type Wheels, Oil seals
Suspension	3" wide rubber bushed Slipper Spring w/ equalizer, capacity 20,000 lbs. tandem (Adj. Alignment)
Axles	Two Heavy Duty Dexter, 10,000 lbs. each, Inner Bearing Size 2.625", Outer Bearing Size 2.250"
Brakes	12 1/4" x 4" Electric with Breakaway Switch
Break-away	12 Volt, wet cell battery with integrated battery charging system

OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) Additional "ROTO-RINGS"®
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
 Spare Tire & Rim 235/80R16 (E) Optional: Spare Tire Carrier
 Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
 Ramps Wood (standard) Ladder (Optional N/C) Extension Ramps T-6 Alum. 22" x 75" 8° angle (SET)
 Parking Jack Optional: 2-Speed Jack
 Optional: Jack mounted on Headboard
 Optional: 2-Speed Landing Gear is Available
 Apitong Decking in lieu of Oak



Call (800) 257-8163 for more information