


# 20 HALX 20 Ton Tag - (2) 20K ABS Air Brake Axles

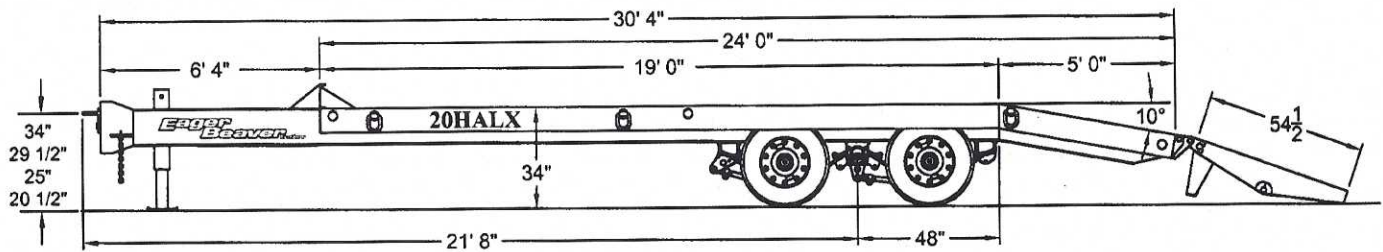

**Capacity: 40,000 lbs. Trailer Weight: 8,140 lbs.**  
**Deck Width: 8 ft. 6 in. Length: 19 ft. Height: 34 in.**  
**Hi Tensile V-50 Steel Mainframe**  
**Pierced Crossmembers**  
**Suspension: Hutch H-9700, Three Leaf, Capacity 50,000 lbs.**

**Heavy Duty Jack**  
**Drawbar Storage Area**  
**Cold-Formed Drawbar & Nose Plate**  
**Patented "ROTO RINGS"® Swivel 360°**  
**100% Sealed Modular Wiring Harness**

## SPECIFICATIONS

Frame	Mainrails: W14" x 22 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	Sealed L.E.D., 12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 1/2" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	70,000 lbs. static / 10,000 lbs. lift (Heavy Duty screw type)
Tie Down	Three per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

## RUNNING GEAR

Tires	Eight 215/75R17.5 (H) Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 6.75 x 17.5, 8-Bolt, Hub-Piloted Disc Wheels
Suspension	Hutch H-9700, Three leaf, capacity 50,000 lbs. tandem
Axles	Two 5" diameter 20,000 lbs. each, H.M. series bearings (maximum axle track width)
Brakes	12 1/4" x 7 1/2" Air, "S" Cam, Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

## OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (96" Optional Width)  
 Additional "ROTO-RINGS"®  
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate  
 Spare Tire & Rim 215/75R17.5 (H) Optional: Spare Tire Carrier  
 Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate  
 Ramps Wood (standard) Ladder (Optional N/C)  
 Parking Jack Optional: 2-Speed Jack Optional: Jack mounted on Headboard Optional: 2-Speed Landing Gear is Available  
 Apitong Decking in lieu of Oak  
 Paint (other than standard Yellow) Price on Request